


ST DISPENSERS WITH METER



LASER INS

Laser et Electronique pour le TP

Espace Vinci – Bat 17A – 24-28 avenue Graham Bell
77600 Bussy Saint Georges
Tél : 01 64 76 83 35 – Fax : 01 64 76 83 37 – contact@laserins.fr

FR. Stations de transvasement du gasoil à usage privé. Faciles à installer, mobiles et compactes, elles sont utilisables là où il est nécessaire de compléter des réservoirs mobiles ou enterrés par le groupe de distribution. Elles sont pourvues de soupape de pied avec filtre et support pistolet. Longueur du tuyau de distribution 4 mètres (6 mètres sur demande).


Elles peuvent être intégrées dans un coffre métallique pour la protection des composants et livrées avec un filtre séparateur d'eau. Tous les accessoires nécessaires pour compléter l'installation sont également disponibles.

PERFORMANCE

- Débit : jusqu'à 90 l/min
- Précision : +/- 1 %
- Disponible en version CA et CC
- Bruit : inférieur à 75 dB

PRODUCTS' RANGE WEIGHT AND PACKAGING

Code without metal box	Weight		Packaging		
	kg	lbs	mm	inch	pcs/box
F00385P0A	16	35	357x357x275	14,1x14,1x10,8	1
F00287P0A	16	35	357x357x275	14,1x14,1x10,8	1
000390000	21	46	357x357x275	14,1x14,1x10,8	1
000392000	23	50	357x357x275	14,1x14,1x10,8	1
000395000	23	50	480x370x265	18,9x14,6x10,4	1
000397000	20	44	480x370x265	18,9x14,6x10,4	1
000256000	10	22	357x357x275	14,1x14,1x10,8	1
F0023500B	13	29	357x357x275	14,1x14,1x10,8	1
F0023600B	13	29	357x357x275	14,1x14,1x10,8	1
F0023300B	14	31	357x357x275	14,1x14,1x10,8	1
F0023400B	14	31	357x357x275	14,1x14,1x10,8	1
F0024000A	24	53	480x370x265	18,9x14,6x10,4	1
F0024100A	24	53	480x370x265	18,9x14,6x10,4	1
F00340070	17	37	357x357x275	14,1x14,1x10,8	1

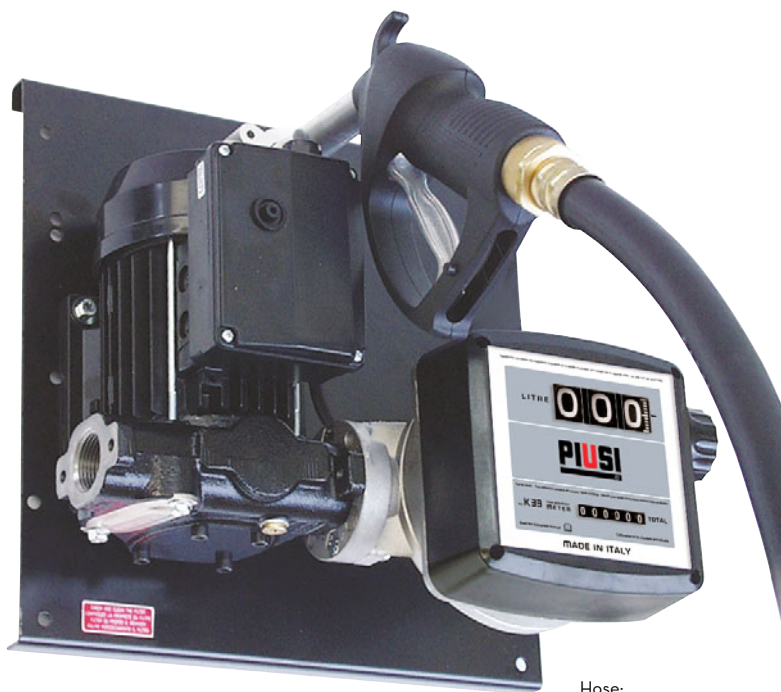

Hose:
- length 4 m
- Ø 1"

DISPENSERS

Flow-rate

up to
90 l/min
(up to 24 gpm)

Accuracy

+/-
1%



PIUSI
®

DISPENSERS

PUMPS

METERS

NOZZLE
METERS

NOZZLE

SPECIAL
EQUIPMENTSFLUID
MONITORING

ACCESSORIES

FILTERING

ON REQUEST

Meter
K33Meter
K600Manual
nozzleAutomatic
nozzle

ST Panther 56 K33

Metal box (565x308x582)
Code: 00933100A



ON REQUEST

AC pump
Panther 56 - 72AC pump
E 80 - E 120AC pump
Viscomat 70 - 90DC pump
Bypass 3000DC pump
Panther DCDC pump
Bipump

PRODUCTS' RANGE TECHNICAL DATA

Code without metal box	Code with metal box	Description	Fluids type	Flow-rate l/min gpm		Voltage AC V./Hz DC Volt Power Watt Amp. max.			Meter mod.	Nozzle type	Filter H ₂ O filter	Inlet BSP
F00385P0A	-	ST Panther 56 K33	D	56	15	230/50	350	3	K33	Man.	NO	3/4"
F00287P0A	F00365P0A	ST Panther 56 K33 A60	D	56	15	230/50	350	3	K33	Aut.	NO	3/4"
000390000	-	ST E 80 K33	D	80	21	230/50	700	3,5	K33	Man.	NO	1"
000392000	00036700B	ST E 80 K33 A80	D	75	20	230/50	700	3,5	K33	Aut.	NO	1"
000395000	-	ST E 120 K33	D	90	24	230/50	1150	5,7	K33	Man.	NO	1"
000397000	00036900B	ST E 120 K33 A120	D	90	24	230/50	1150	5,7	K33	Aut.	NO	1"
000256000	-	ST Viscomat 70 K33 (Rapsoil)	B	30	8	230/50	950	4,6	K33	Man.	NO	1"
-	F00265020	ST Viscomat 90 K600 (Rapsoil)	B	65	17	230/50	1600	7,8	K33	Man.	NO	1"
F0023500B	-	ST ByPass 3000/12V K33	D	40	10	12	260	22	K33	Man.	NO	3/4"
F0023600B	-	ST ByPass 3000 inline 24V K33	D	40	10	24	300	12	K33	Man.	NO	3/4"
F0023300B	-	ST ByPass 3000/12V K33 A60	D	35	9	12	260	22	K33	Aut.	NO	3/4"
F0023400B	-	ST ByPass 3000 inline 24V K33 A60	D	35	9	24	300	12	K33	Aut.	NO	3/4"
F0024000A	-	ST Bipump 12V K33 Self 3000	D	80	21	12	530	44	K33	Man.	NO	1"
F0024100A	-	ST Bipump 24V K33 Self 3000	D	80	21	24	540	22,5	K33	Man.	NO	1"
-	F0039900A	ST Bipump 12V K33 A120 (Rapsoil)	B	80	21	12	530	44	K33	Aut.	NO	1"
F00340070	-	ST Panther 12V K33 A60	D	56	15	12	420	35	K33	Aut.	NO	3/4"

The units can also be supplied for operating under different voltages and without meter.