


DISPENSER PIUSI ST EX50



LASER INS

Laser et Electronique pour le TP

Espace Vinci – Bat 17A – 24-28 avenue Graham Bell
77600 Bussy Saint Georges

Tél : 01 64 76 83 35 – Fax : 01 64 76 83 37 – contact@laserins.fr

FR. Stations de transvasement à usage privé de liquides inflammables (essence, kérosène et gazole) avec pompe certifiée ATEX/IECEx.

Faciles à installer, mobiles et compactes, elles sont utilisables là où on souhaite compléter les réservoirs mobiles ou enterrés avec le groupe de distribution.


- Structure robuste et compacte ;
- Corps en fonte ;
- Rendement élevé du moteur en mesure de distribuer jusqu'à 50 l/min, absorption réduite pour une durée prolongée ;
- Filtre anti-parasites (compatibilité électromagnétique EMC) ;
- Composants à brides : les pompes, compte-litres et filtres peuvent être montés sans mastic, pour des connexions plus rapides et sûres ;
- Vanne de dérivation incorporée ;
- Protection thermique ;
- Filtre métallique en aspiration



K33 only



Nozzle

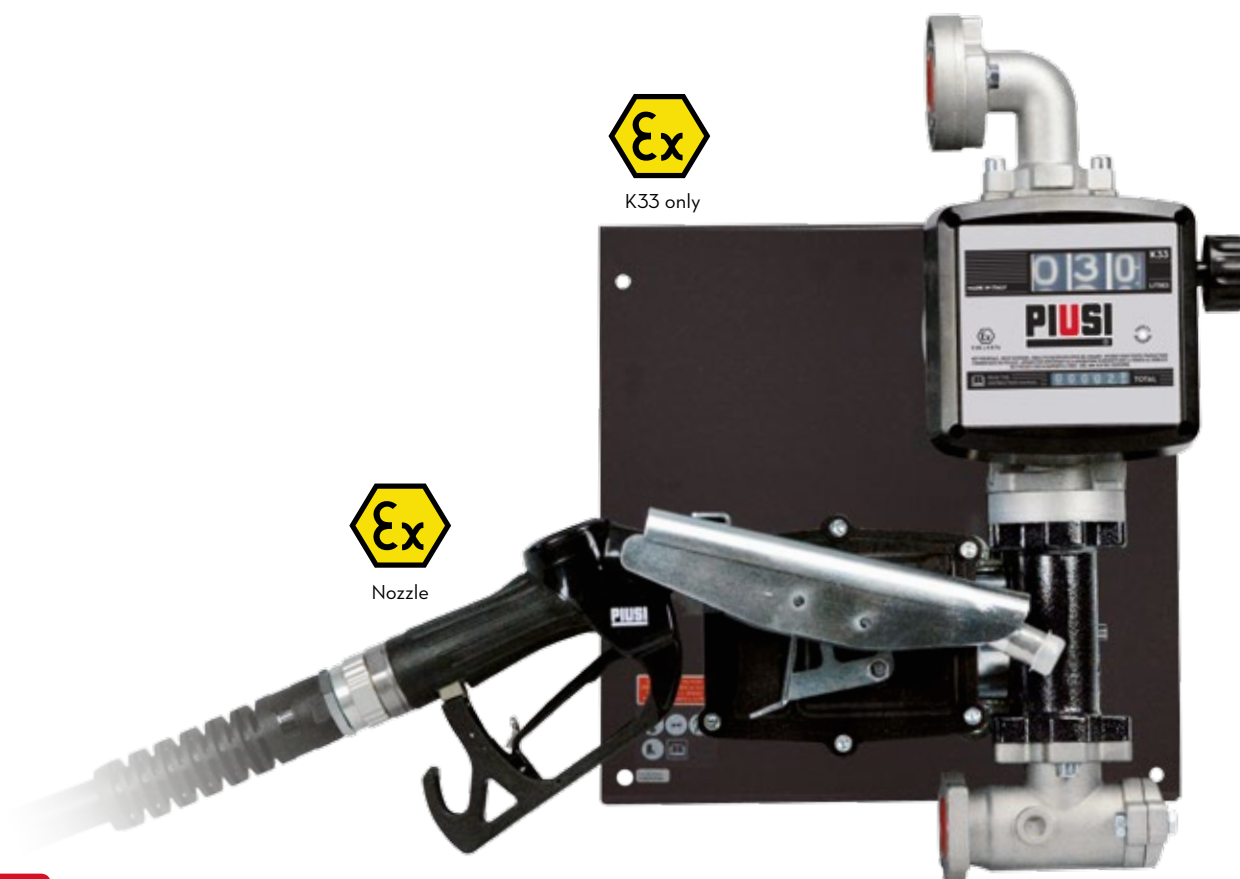

PRODUCTS' RANGE WEIGHT AND PACKAGING

Code	Weight		Packaging		
	kg	lbs	mm	inch	pcs/box
F00377000	12	24,5	600x400x290	23,6x15,7x11,4	1



II 2 G



Pump only


DISPENSERS

ANTIFREEZE
BIODIESEL
DIESEL
FOOD
GASOLINE
GREASE
KEROSENE
OIL
AdBlue®
WATER
WINDSCREEN

Flow-rate

up to
50 l/min
(up to 13 gpm)

PIUSI

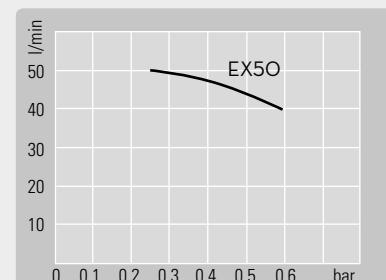

Our pump complies with the following marking ATEX/IECEX

II	2	G	Ex	d	IIA	T4	Gb
GROUP	CATEGORY	TYPE OF EXPLOSIVE ATMOSPHERE	PERMANENT PREFIX	PROTECTION METHOD	GAS CLASS	TEMPERATURE CLASS	EQUIPMENT PROTECTION LEVEL

FEATURES

Gasoline Hose

 Code F1815100A
(4 mt 3/4")

Automatic nozzle

 Code F00613020

ON REQUEST

Cable gland

 Code F18624000

Metric adaptor

 Code F18156000

Water captor

 H₂O

PRODUCTS' RANGE TECHNICAL DATA

PRODUCT RANGE													
Code	Description	Fluids	Flow-rate		Voltage			Nozzle	Meter	Inlet	Hose		Filter
		type	l/min	gpm	AC V./Hz DC Volt	Power Watt	Amp. max.	type	type	BSP	length	Ø	
with meter													
F00377000	ST EX50 230V K33 ATEX + aut. nozzle	DGK	50	13	230/50-60	250	1	Aut.	K33	1"	4 m	3/4"	-

(*) Upon request it is available with different voltages and 60 Hz frequency

The pump can be used only with the following fluids: - diesel - kerosene - petrol - petrol alcohol mixed max 15% - avgas 100/100LL (pump only) - jet A/A1 (pump only) - aspen 2/4

DISPENSERS

PUMPS

METERS

NOZZLE
METERS

NOZZLE

SPECIAL
EQUIPMENTS

FLUID
MONITORING

ACCESSORIES

FILTERING